



Check out our contest!

[suzuka.com.my/promotion](http://suzuka.com.my/promotion) | T&C Apply



## Free Product Training

For All Industry Professionals

[suzuka.com.my/career-training](http://suzuka.com.my/career-training)



## WALL FINISH PROFESSIONALS



[suzuka.com.my](http://suzuka.com.my)



suzuka.group | Hotline : +6012-258 7388



ISO 9001  
ISO 14001  
ISO 45001  
CERTIFIED



STRATO ELLOURA-E1-2509



Photos of the products shown in this catalogue may vary in color due to lighting condition & printing. We suggest you examine actual product samples before ordering.



EDITION  
01

WALL FINISH  
PROFESSIONALS.

SINCE  
1977

# STRATO<sup>®</sup> METALLICS ELLOURA



INTERIOR TEXTURED PAINTS

Complies to the

- American California Proposition 65 Standard.
- LEED, U.S. Green Building Council Standard.



STRATO® METALLICS

Emoura



#### Lighting Color Influence

Warm Light

Neutral Light

Cool Light

STE



STE 101 - 110

This matte, silk-like texture diffuses light with a muted glow, offering a rich, tactile sensation that feels as serene as it looks.

Designed for those who seek subtle luxury, it wraps walls in a smooth, rich touch.

#### Appearance

Low Sheen High Sheen

Smooth Texture Rough Texture

Matte Metallic

#### Features

- Interior use only



Low VOC & Odor




Green Choice, Water Based & Eco-friendly



Formaldehyde & Lead Free



Easy Application & DIY Friendly



Applicable on Ceiling



Easy to Touch Up



Easy Maintenance




Pearly Finish

Complies to the

- American California Proposition 65
- LEED, U.S. Green Building Council Standards



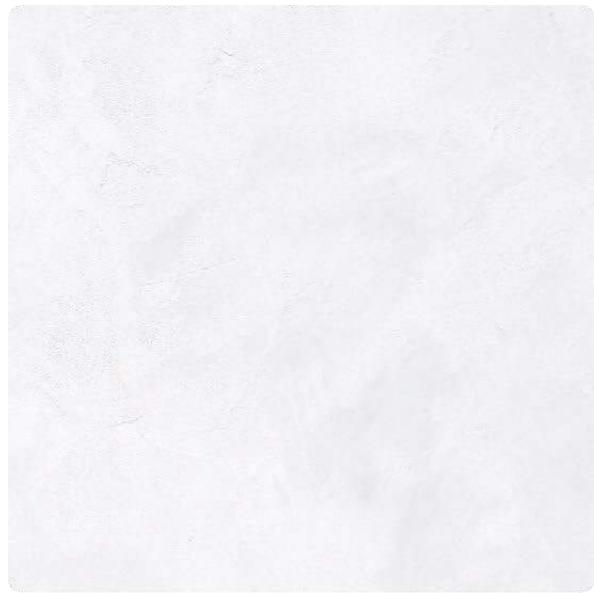

**STE-101** Breeze White



**STE-102** Whisper Grey



**STE-103** Sky Grey




**STE-102** Whisper Grey & **STE-107** Mellow Taupe

**STE-103** Sky Grey




**STE-101** Breeze White

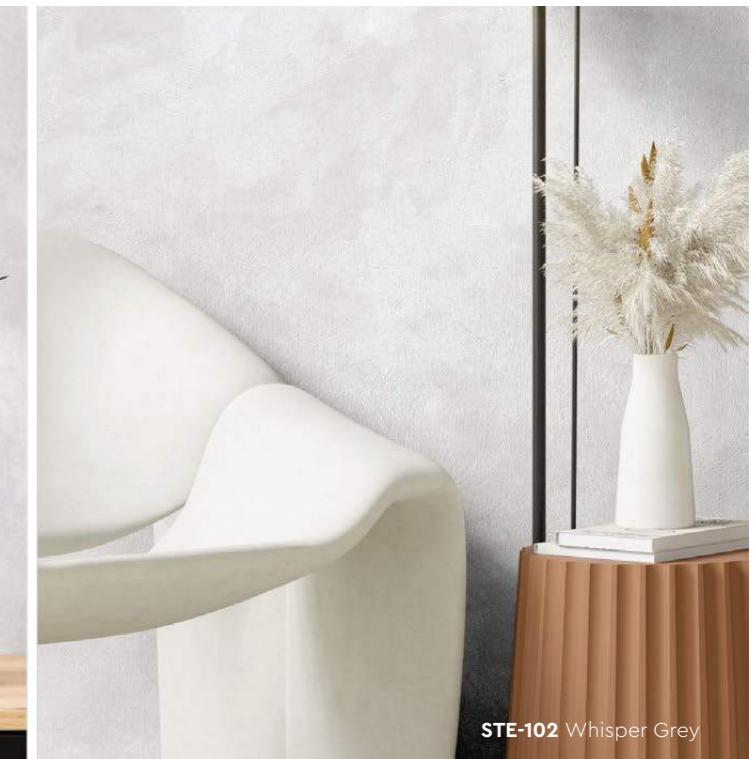

**STE-102** Whisper Grey


STE-104 Platinum Grey

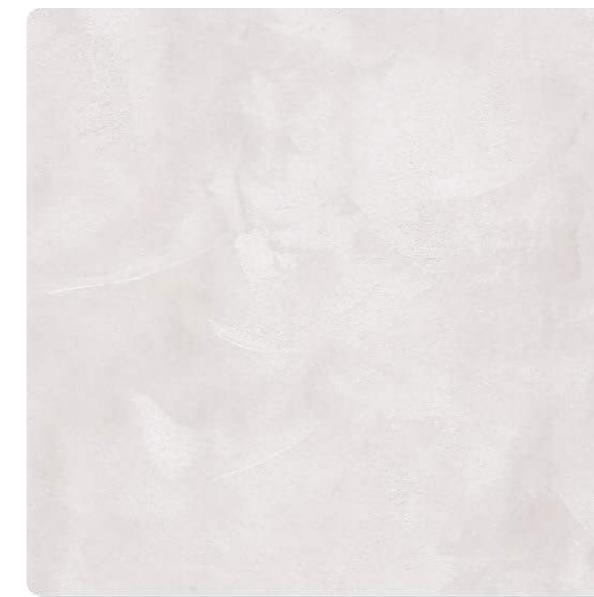

STE-104 Platinum Grey



STE-105 Downy Daisy

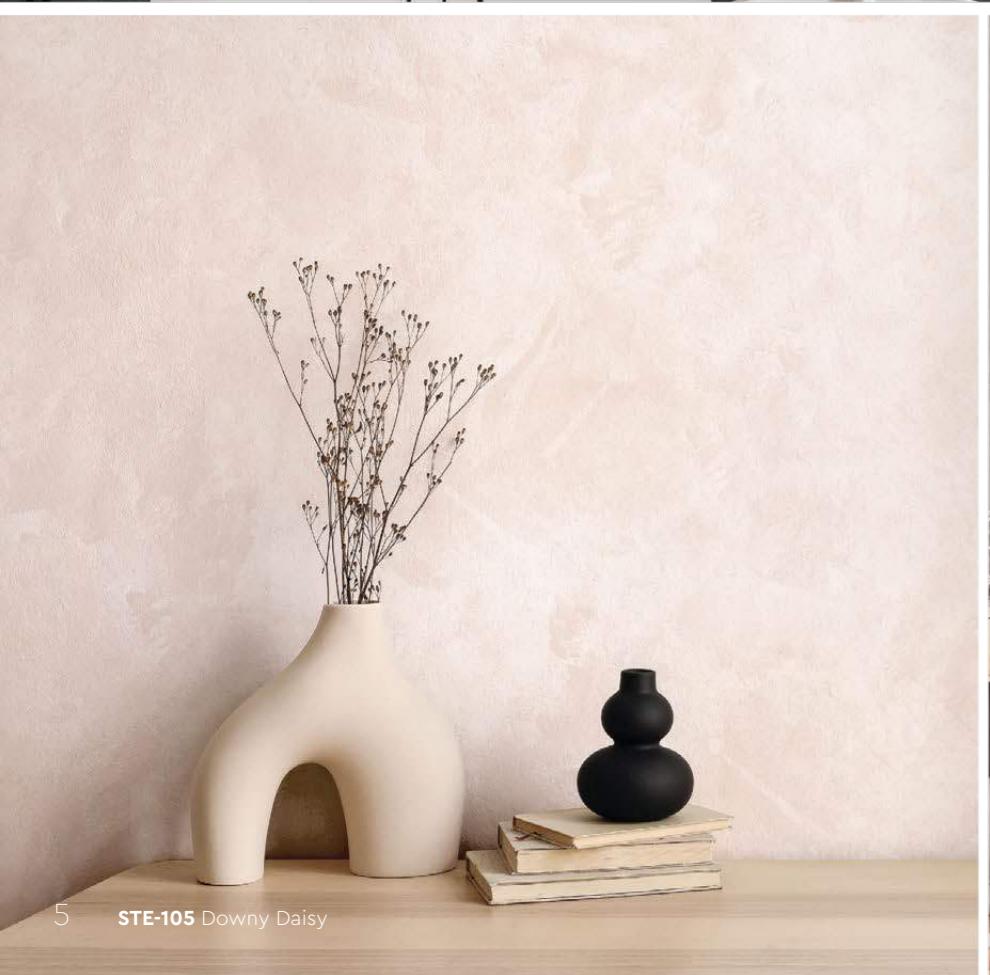

STE-107 Mellow Taupe



STE-106 Pastel Mauve



STE-107 Mellow Taupe

STE-110 Green Laurel



STE-106 Pastel Mauve



STE-108 Moonlit Cream



STE-109 Coral Petals



STE-108 Moonlit Cream



All color shown are as close to the actual Suzuka® Strato® colors as modern printing techniques permit, nonetheless, there are still color/tone differences.

**We highly recommend seeing actual samples before ordering.**



STE-110 Green Laurel



**SUZUKA®  
WALL  
SEALER  
PRO**

**“ Make your  
wall finishes  
last longer! ”**

**Superior primer for concrete, skimmed or masonry surfaces.**

This sealer that has good substrate penetration abilities to increase adhesion of product to prevent chalking or peeling off. It has excellent alkaline resistance properties that can prevent efflorescence. It is an ideal base coat for any SUZUKA® or any wall finish products.

**Coverage** 6.5 - 8.5 m<sup>2</sup>/l/coat **Drying Time (hour)** Surface Dry : 1 | Hard Dry : 5 | Recoating : 5  
Substrate Temperature: 23°C - 26°C

**Packing Size:** 1L 5L 20L

**Suitable for:**

- Masonry wall
- Brickwork
- Plaster
- Skimmed Coat
- Asbestos free substrate

**Features:**

- Excellent alkaline resistance to prevent efflorescence.
- Good for new walls and repainting.
- Prevents skim coat from chalking & peeling off.
- Extremely good penetration.
- Excellent adhesion.
- Exterior and interior use.
- Applicable with brush, roller or spray gun.

**Airless Spray** Nozzle 1.8 - 2.0 mm | Spray Angle Degree 65° - 80° | Pressure 210 psi/150kg/cm<sup>2</sup>



Application Video

## Application Technique

### Preparation:

- Surface shall be dry and free from dirt, oil, grease and foreign matters.
- Surface unevenness, crock, & the like shall be treated with cement filler.

### IMPORTANT:

Color may vary on application technique & amount of material used.

### Dilution Guide:

Primer : Max 3% of clean water  
Texture : Do not dilute.



### 1 Primer

The prepared surface shall be primed with Suzuka Strato Primer. Roll on Strato Primer on the surface and leave to dry for 4 hours. (The primer can be diluted with maximum 3% of clean water)


Tool: Roller



### 2 Texture Coat

Apply 1-2 layers of Strato Elloura in overlapping pattern using trowel. Every layer required 30 - 40 minutes to dry. Leave 4 hours for complete dry.

Tool: Stainless Steel Trowel



Tools: Roller, Stainless Steel Trowel

## Packing Data

Material	Packing	Coverage (per liter / ±15%)
Strato Primer	1 L	7 - 9 sqm
Strato Elloura	1 L	6 - 7 sqm

