



BRICK & STONE VENEER . TEXTURED PAINT . KASTPANEL . ECES . TEXTURE COATING . PEBBLE STONE COATING



# suzuka.com.my

**f** suzuka.group | Hotline: +6012-258 7388







SGM-E2-2308



O2

Photos of the products shown in this catalogue may vary in color due to lighting condition & printing. We suggest you examine actual product samples before ordering.






# SUZUKA® GRANI MULTICOLOR

GRANITE EFFECT COATING

SGM uses high-performance and environmentally-friendly technology. Its water-based coating packages itself into individual capsules, allowing each to contain its own unique formula and colour. This creates a one-time multi-colour spray system that is not only durable, but also effective in mirroring the authentic granite texture.

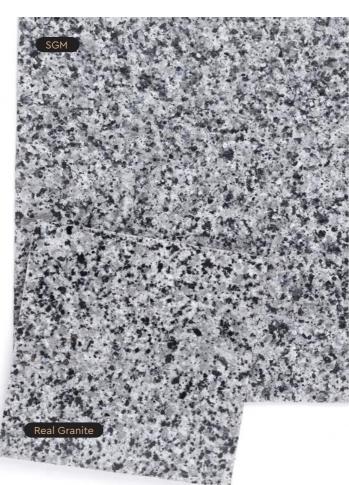

# SUZUKA® Grani Multicolor vs. Real Granite

Factors	Suzuka Grani Multicolor (SGM) Real Granite		
Installation Time	Quick	Slow	
Installation Ease	Simple	Difficult & requires extensive set-up	
Installation Cost	Economical	Expensive	
Material Cost	Economical	Expensive	
Colour Control	Yes	No	
Environmental-Friendliness	Non-invasive & water-based	Environmentally invasive	
Safety	No risk	Risk of loosened stones falling	
Customization	Yes		
Maintenance	Economical and simple Requires replacement & colour matchi		

# **Advantages**

- One-time, multi-colour spray system
- Colours and patterns can be customized
- Resistant to stains, fungus, algae, acid and alkali
- Washable and easy to maintain

- High adhesion and anti-peeling/flaking
- Superb elasticity and is crack resistant
- Water-based and eco-friendly
- Excellent durability against weather conditions



# **Application Process**

Process	Material (Mixing Weight Ratio)	Number of Coats	Time Interval Between Process	Consumption (±15%)	Tools	
1 Surface Preparation	Surface needs to be dry and free from dirt, oil, and foreign matter. Surface unevenness, including cracks, will need to be treated with cement filler.					
2 Primer	EM Primer : Water 100 : 0 - 5	1	4 hrs	7 - 9 m²/l	Spray Gun, Roller or Brush	
	SGM Body Coat : Water 100 : 0 - 5	1	24 hrs	3 - 3.5 kg/m²	Spray Gun	
3 Texture Coating	SGM Base Color : Water 100 : 0 - 2	2	4 hrs	6 - 7 m²/l	Spray Gun, Roller or Brush	
	SGM Texture Coat : Water	1 – 2	24 hrs	0.5 - 0.8 kg/m²	SGM Spray Gun	
4 Top Coat	SGM Topcoat Satin: Water 100 : 0 - 2	1	-	8 - 9 m²/l	Spray Gun, Roller or Brush	



# Superior primer for concrete, skimmed or masonry surfaces.

This sealer that has good substrate penetration abilities to increase adhesion of product to prevent chalking or peeling off. It has excellent alkaline resistance properties that can prevent efflorescence. It is an ideal base coat for any SUZUKA® or any wall finish products.

Packing Size:





|--|

Coverage	Drying Tim	ne (hour)	Airless Spray
<b>6.5 - 8.5</b> m <sup>2</sup> /l/coat	Surface Dry: 1 Hard Dry: 5 Recoating: 5	Substrate Temperature: 23°C - 26°C	Nozzle: 1.8 - 2.0 mm Spray Angle Degree: 65° - 80° Pressure: 210 psi/150kg/cm²

### Suitable for:

- Masonry wall
- Brickwork
- Plaster
- Skimmed Coat
- Asbestos free substrate

## Features:

- Excellent alkaline resistance to prevent efflorescence.
- Good for new walls and repainting.
- Extremely goof penetration.
- · Excellent adhesion.
- Exterior and interior use.










SGM-G-101

SGM-G-102

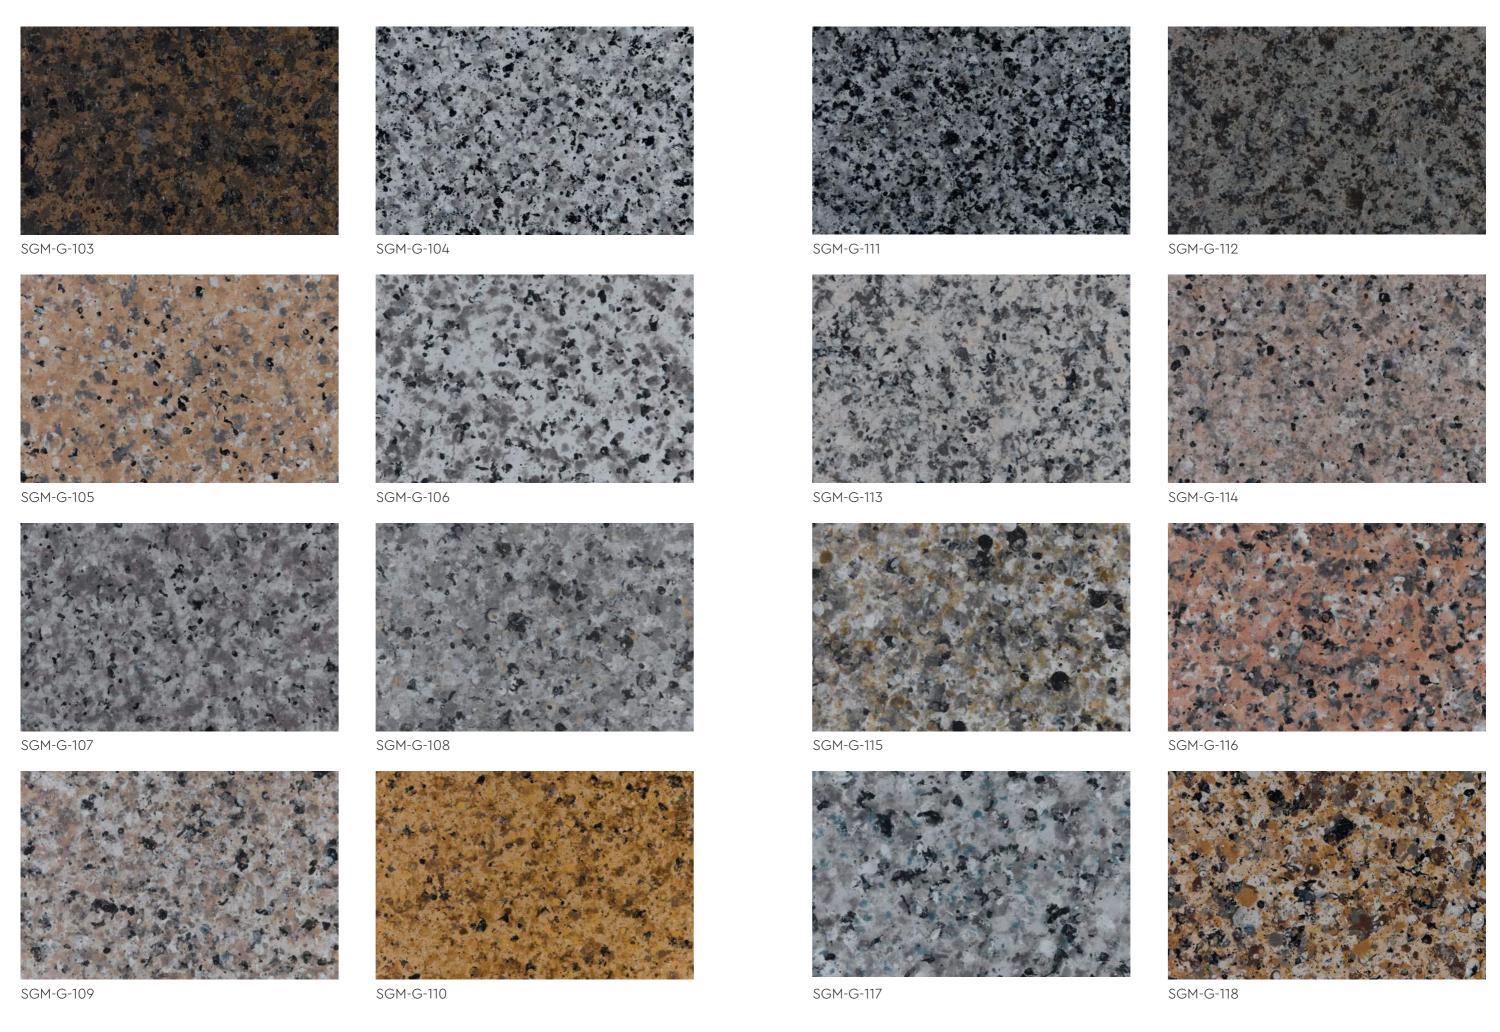

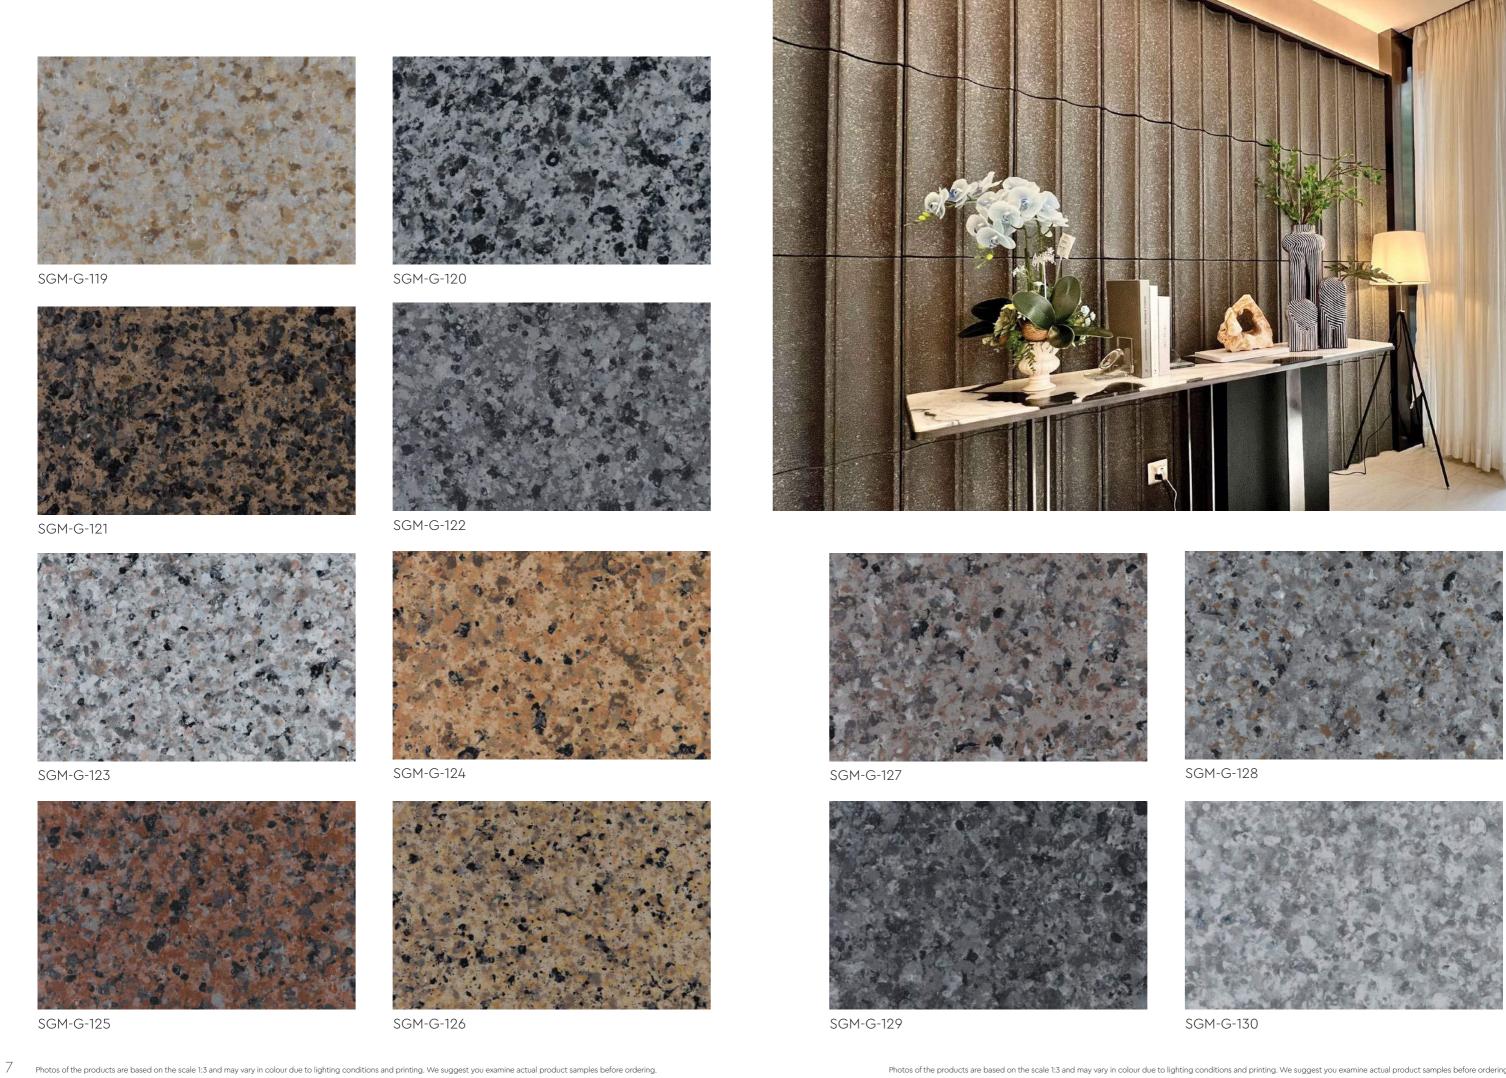

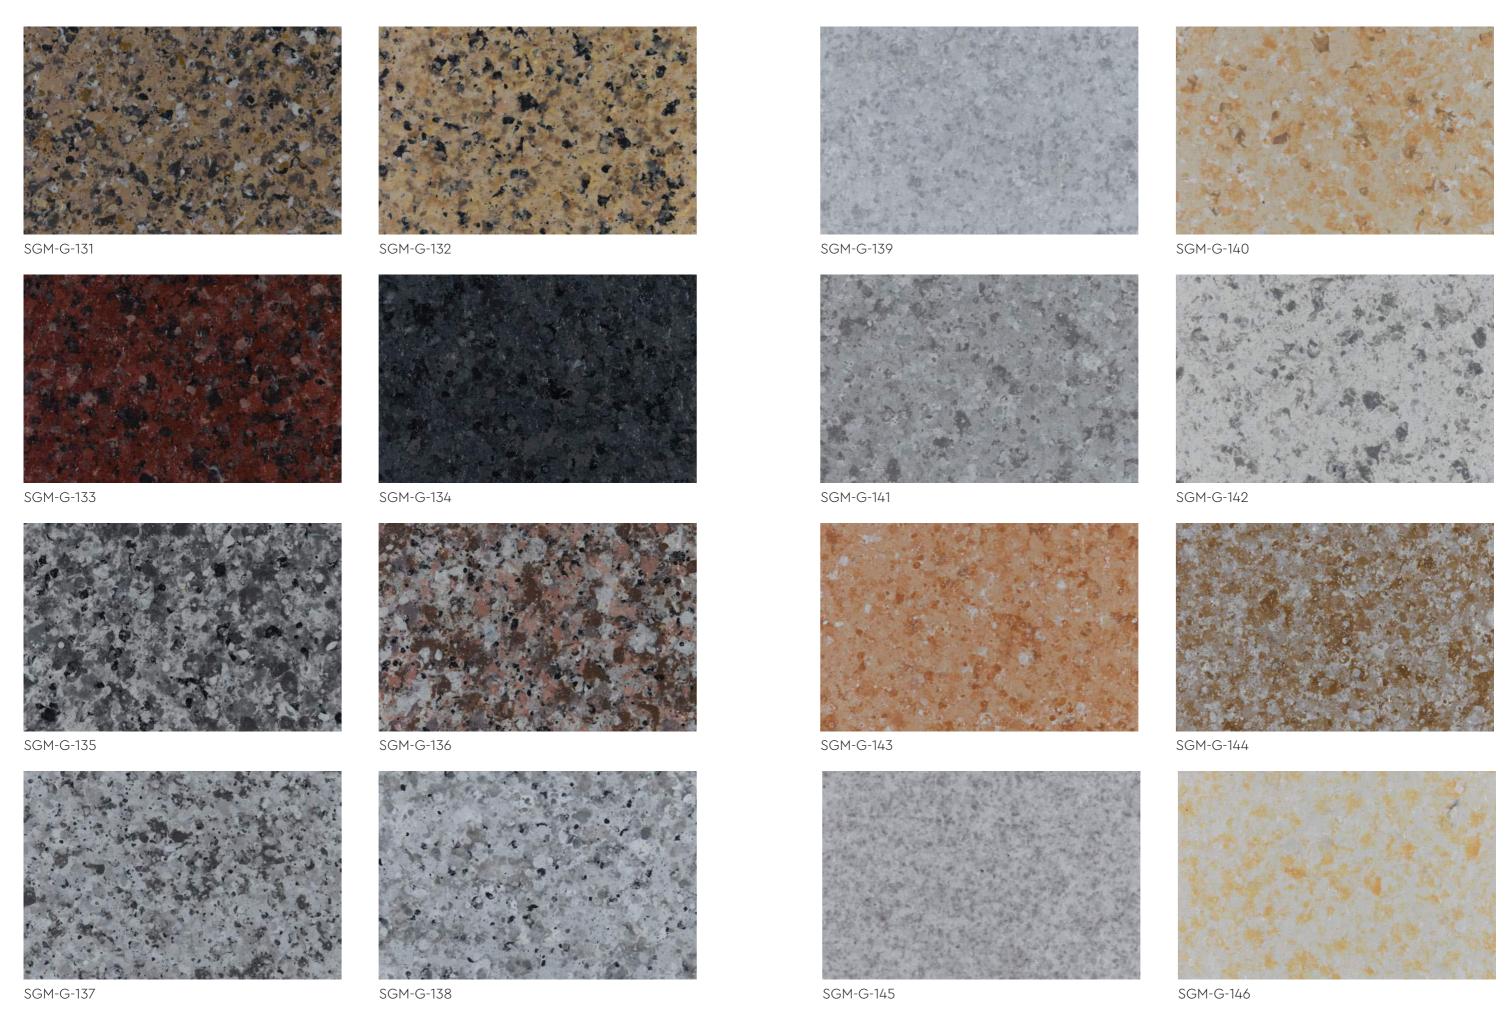





























SGM-S-317

SGM-S-318