

TYPE A




SW-A-101



SW-A-102



SW-A-103

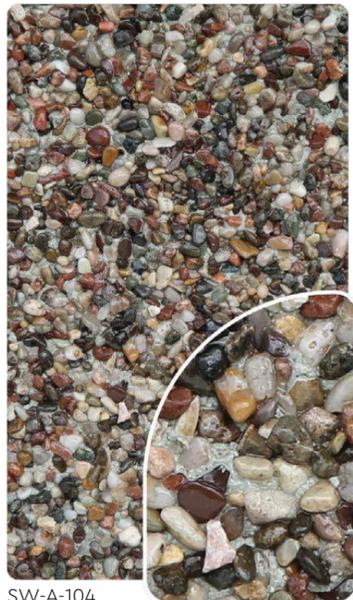

SW-A-104



SW-A-105

Coating Thickness & Aggregate Size:

- 3.0 kg/m² of 2.0 mm Stoneweave Plaster
- 6.0 kg/m² of 3.0 mm Stoneweave Aggregate

Packing:

- 25 kg / pail Stoneweave Plaster
- 32 kg / pail Stoneweave Aggregate

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.

TYPE B



SW-B-201



SW-B-202



SW-B-203



SW-B-204



SW-B-205

Coating Thickness & Aggregate Size:

- 3.8 kg/m² of 3.0 mm Stoneweave Plaster
- 8.0 kg/m² of 5.0 mm Stoneweave Aggregate

Packing:

- 25 kg / pail Stoneweave Plaster
- 32 kg / pail Stoneweave Aggregate

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.



SUZUKA®
**STONE
WEAVE**
ARCHITECTURAL STONE FINISH

SUZUKA® STONEWEAVE Application Process

Process	Material (Dilution)	Number of Coats	Time Interval Between Process	Consumption (±15%)	Tools
1 Primer	Suzuka® EM Primer (Dilution: Max 5% with water)	1	4 hrs	7 - 9 m ² /l	Spray Gun, Roller or Brush
2 Texture Coat	Stoneweave Plaster	1	24 hrs	3.0 - 5.0 kg/m ²	Trowel
3 Aggregate	Stoneweave Aggregates	1	24 hrs	6.0 - 8.0 kg/m ²	Spray Gun, Roller
4 Top Coat	Suzuka® Stonecare High Gloss (Dilution: Max 5% with thinner)	1 - 2	4 - 6 hrs	7 - 9 m ² /l	Roller

* For more details, please request to see the Technical Data Sheet (TDS).