


Cnap & Win!
iPad Pro
 Check out our contest!
suzuka.com.my/promotion | T&C Apply



KASTONE® FLEXI

FABRICATED
 WALL PANEL

EDITION
01

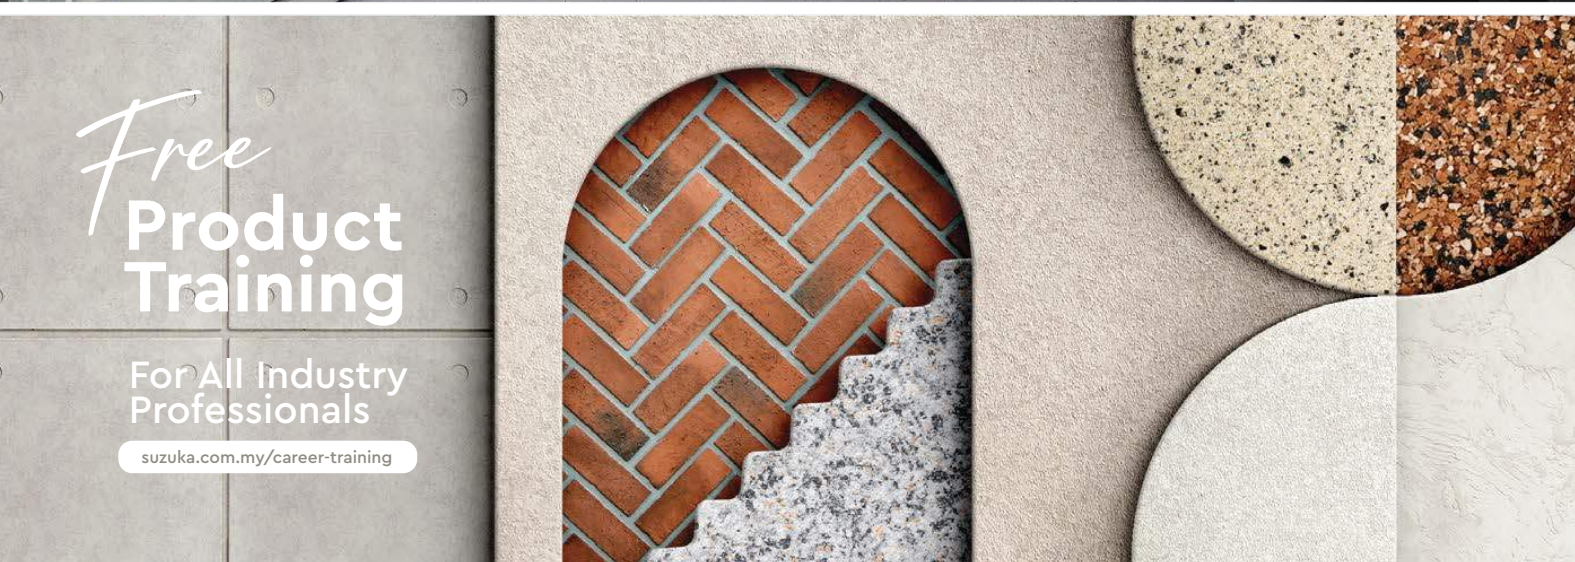

Free
**Product
 Training**

For All Industry
 Professionals

suzuka.com.my/career-training



suzuka.com.my

f @ i suzuka.group ☎ +6012-258 7388




All images included in this catalog are for visual reference only.
 Actual product may have a slight color difference due to variations in printing processes or
 digital viewing settings. We suggest you examine actual product samples before ordering.



KASTONE FLEXI-E1-2607

WALL FINISH
 PROFESSIONALS.

SINCE
 1977

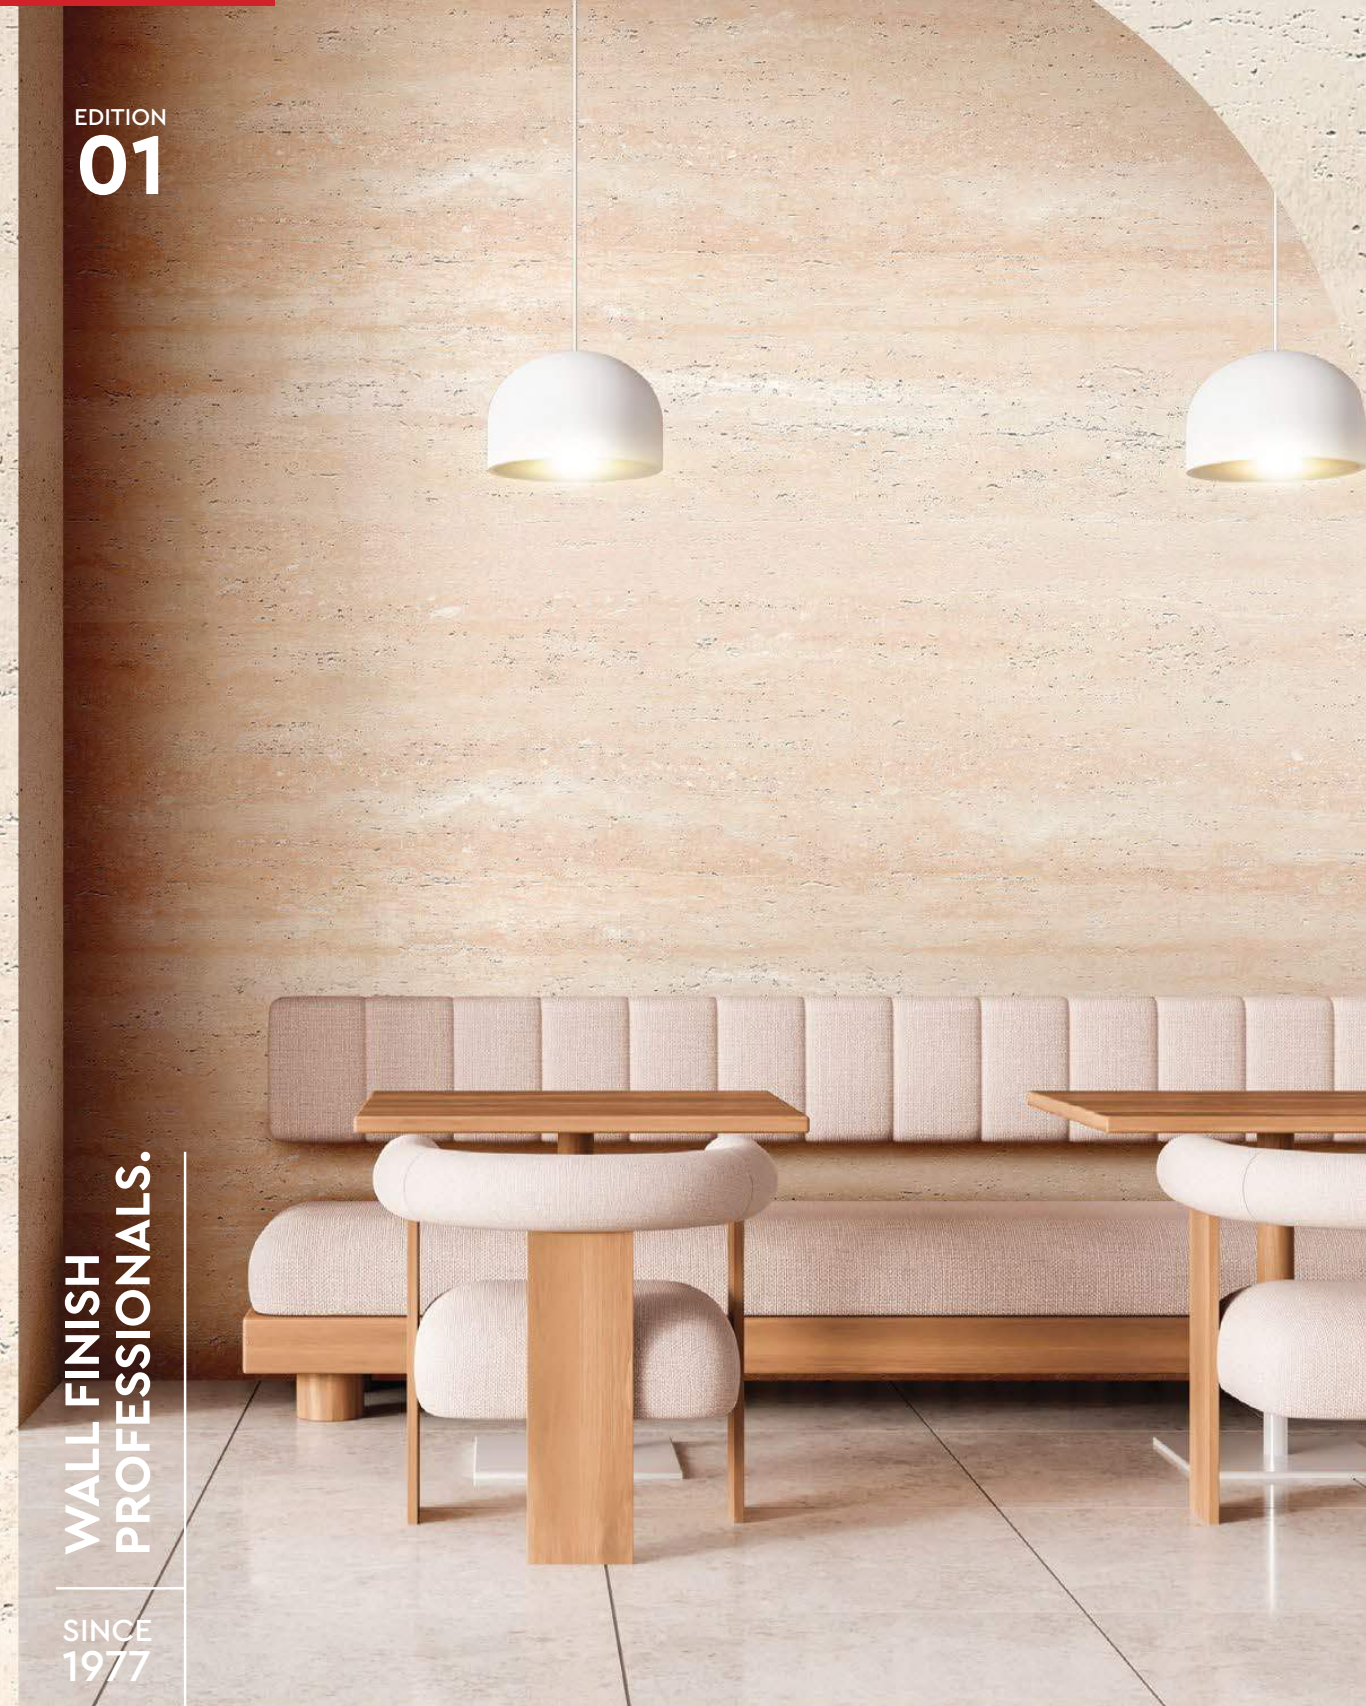

KASTONE® FLEXI

FABRICATED
WALL PANEL

Kastone® Flexi is a lightweight, flexible, and fabricated wall panel designed for effortless interior installation. Engineered to bend smoothly around curves and columns without cracking, it cuts cleanly with standard tools and glues directly to existing surfaces.

Built for long-term durability, **Kastone® Flexi** is 100% water-resistant, anti-mould, and anti-termite, offering a seamless, low-maintenance upgrade for any residential or commercial interior.



Features



Lightweight



Ultra Thin
(3 - 5 mm thickness)



Water
Resistant



Flexible



Anti-mould



Anti-termite



Easy Installation
& DIY Friendly



Suitable for
the Interior

Corduroy

3 Sizes: 120 X 60 cm • 240 X 60 cm • 240 X 120 cm | Thickness: 3 -5 mm | 1 Colour


Heron White | 01



FSC-011
120 X 60 cm



FSC-012
240 X 60 cm

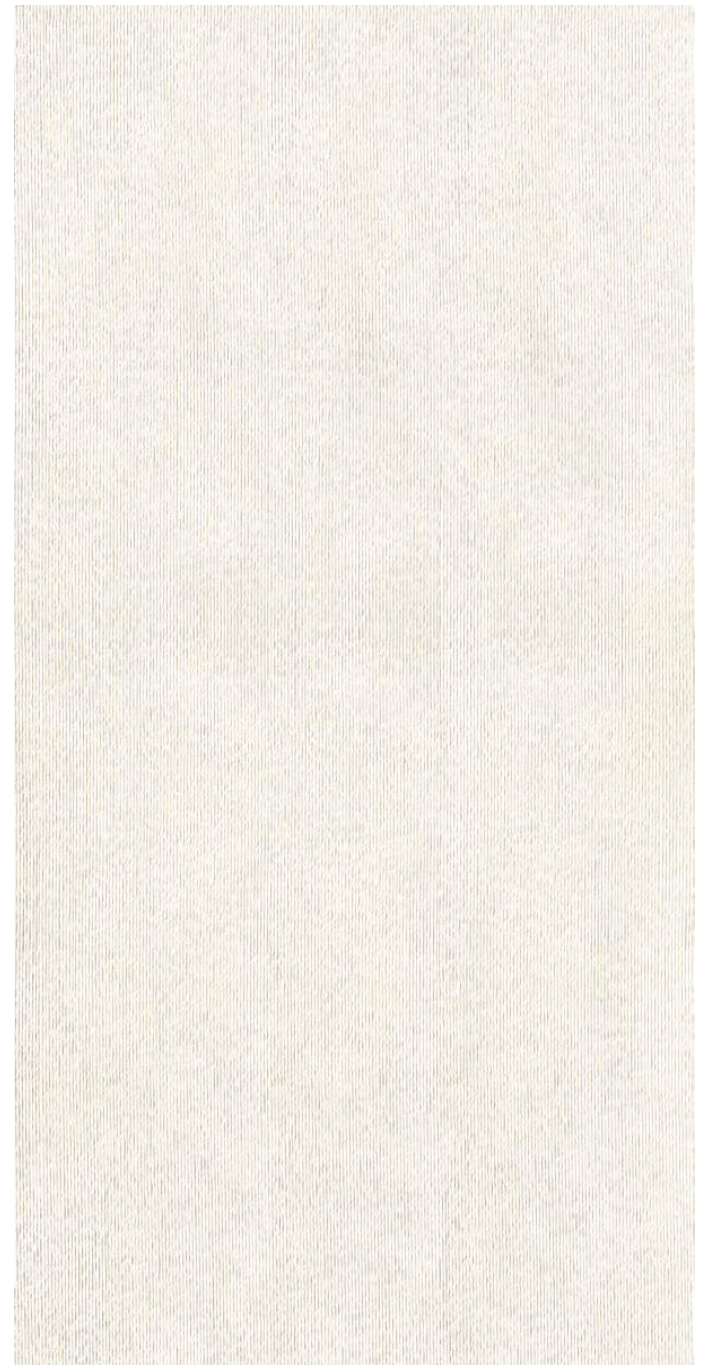


FSC-014
240 X 120 cm

Travertine

3 Sizes: 120 X 60 cm • 240 X 60 cm • 240 X 120 cm | Thickness: 3 -5 mm | 3 Colours

Ancient Ivory | 01

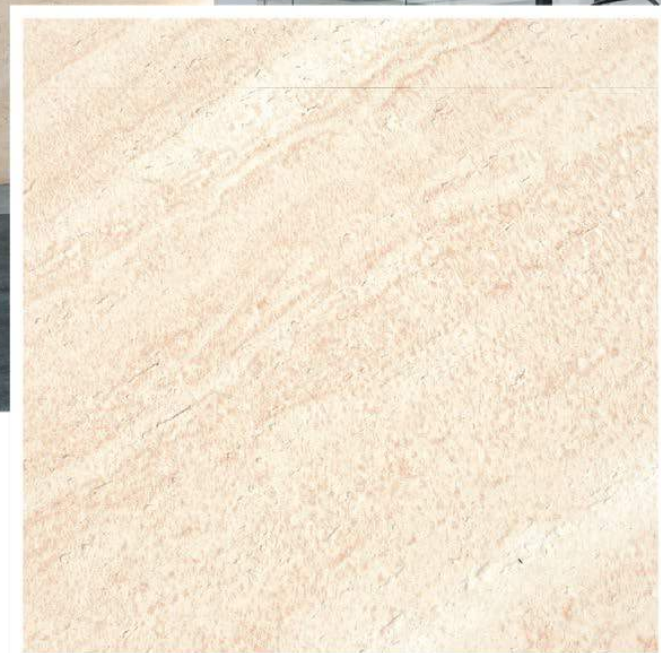

FSB-011
120 X 60 cm



FSB-012
240 X 60 cm



FSB-014
240 X 120 cm



FSB-021
120 X 60 cm



FSB-022
240 X 60 cm



FSB-024
240 X 120 cm



FSB-031
120 X 60 cm



FSB-032
240 X 60 cm



FSB-034
240 X 120 cm

Rammed Earth

3 Sizes: 120 X 60 cm • 240 X 60 cm • 240 X 120 cm | Thickness: 3 -5 mm | 4 Colours



Plateau Brown | **01**



FSA-011
120 X 60 cm



FSA-012
240 X 60 cm



FSA-014
240 X 120 cm





FSA-021
120 X 60 cm



FSA-022
240 X 60 cm




FSA-024
240 X 120 cm




FSA-031
120 X 60 cm



FSA-032
240 X 60 cm

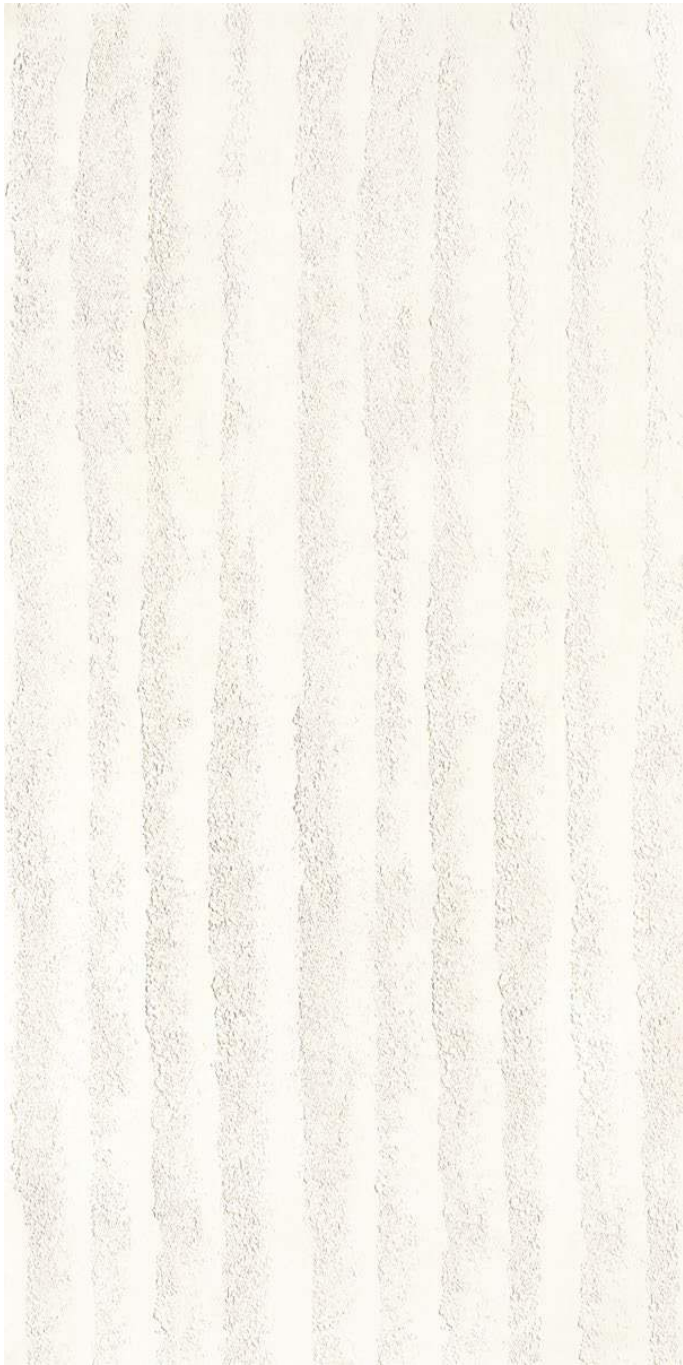

FSA-034
240 X 120 cm

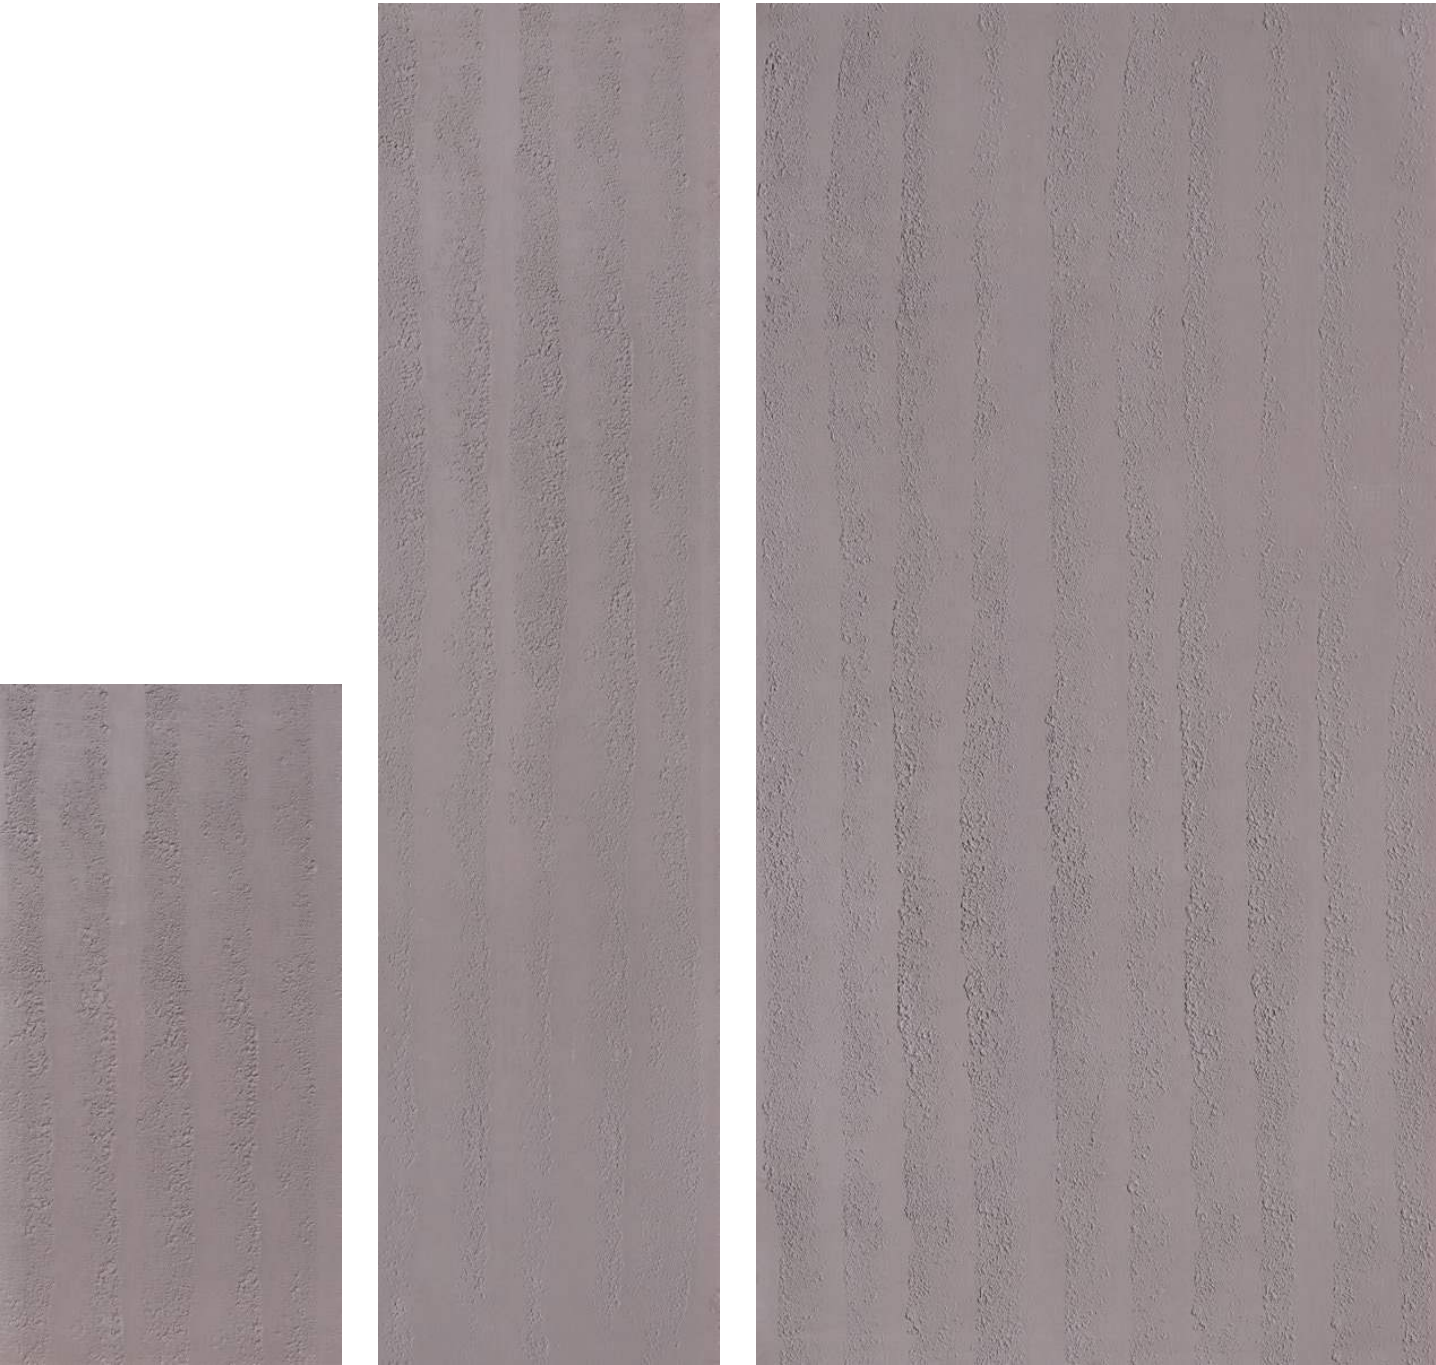

FSA-041
120 X 60 cm

FSA-042
240 X 60 cm

FSA-044
240 X 120 cm




Installation Instructions

Surface Preparation

- Surface needs to be dry and free from dirt, oil, and foreign matter.
- Surface unevenness, cracks or any defects shall be repaired & treated.
- To ensure optimal performance, apply **Suzuka® Wall Sealer Pro** to the wall surface prior to panel application.

Step 1 – Layout Planning

- 1 Measure the dimensions of wall.
- 2 Some panels may need to be trimmed to fit your wall dimensions.
- 3 Arrange the panels to ensure any trimmed edges are concealed from direct view.
- 4 For installation with construction adhesive, it is recommended to outline the panels on the wall first to guide the adhesive placement.

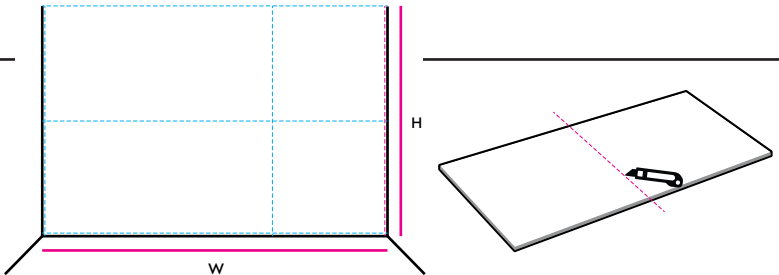

Step 2 – Adhesive & Panel Application

Substrate Types: **Concrete Wall**

Tile Adhesive
C2TES1

- 1 Application of **sealer** is recommended for **concrete** substrate.
- 2 Mix the adhesive thoroughly, following the packaging instructions.
- 3 Apply **tile adhesive** to the **substrate** using a notched trowel to create a combed effect. Ensure the combed lines are perpendicular to the installation direction of the panel.
- 4 Position the panel on the substrate, firmly pressing and supporting it until it attaches securely.
- 5 Press the panel evenly across the surface using a sponge plastering trowel to expel any trapped air and guarantee a compact, secure bond.

Substrate Types: **Plywood or Metal Wall**

Construction Adhesive
KASTONE® EASY

- 1 Application of **sealer** is strongly recommended for **plywood** substrate. For metal substrate, sealer may not necessary.
- 2 Apply an adequate amount of **construction adhesive**.

Recommended adhesive application:

Panel Size **1** : Apply to the **back of the panel**.
Panel Sizes **2 & 4** : Apply to the **substrate**.

- 3 Ensure the adhesive is applied thoroughly along the edges of the panel.
- 4 Additional adhesive may be applied to ensure maximum bonding strength & a faster hold time.
- 5 Install the panel to the wall by pressing and holding it firmly until it attaches securely.
- 6 Attach the panel to the wall as soon as the adhesive is applied to prevent it from drying out before installation.

TECHNICAL SPECIFICATIONS

Series	FSA - Rammed Earth FSB - Travertine FSC - Corduroy		
Panel Size	Size 1	Size 2	Size 4
Dimension (cm)	L120 x W60 x T0.3 - 0.5	L240 x W60 x T0.3 - 0.5	L240 x W120 x T0.3 - 0.5
Coverage Per Piece (sqm)	0.72	1.44	2.88
Weight Per Piece (kg)	3.00	6.00	12.00

PACKING : Packaging methods and specifications may vary based on **order quantity** and **panel dimensions**.

* Data of weight presented is the maximum weight for every piece respectively.

* Please allow a ± 5% tolerance for panel size, weight and colour.

* Product may vary in colour due to lighting conditions and printing.

We suggest you examine product samples before ordering.